

ARE YOU READY ?

CATV Surge Suppression Products

A dramatic black and white photograph of a person in a suit standing in a field, holding a large black umbrella. The person is seen from behind, looking out at a dark, stormy sky filled with heavy clouds and multiple bright lightning bolts. One prominent lightning bolt strikes down towards the horizon. The overall mood is one of anticipation and resilience.

CABLE[®]
I N N O V A T I O N S

Cable Innovations' Commitment to quality

We believe that excellence in Quality is the foundation for the management of our business and the cornerstone of our goal of customer satisfaction.

We believe that Quality is measured in satisfied customers and that continuous improvement of our products will result in meeting and exceeding customers' needs.

We believe that Quality is the key to providing the best possible reliability in the field to our customers.



Michael J. Aquino
President



www.cableinnovations.com

From its inception, Cable Innovations has earned its reputation as the CATV surge suppression experts. Cable Innovations has never wavered in its commitment to providing the toughest, most reliable surge suppressors ever made available to the CATV industry.

Engineering Support

Our engineering staff is committed to supporting our customer's engineering and training staffs with design, application information, on site support and assistance in finding a solution to their surge or overvoltage related problem. Our engineers are available to answer questions from 8:00 am to 5:00 pm Mon.-Fri. EST by calling 770-962-5146 or e-mailing at engineer@cableinnovations.com. Additional technical notes, installation instructions and product specifications are available on our web site at www.cableinnovations.com

Products

Using state-of-the-art equipment, each product is designed to meet or exceed the customers' requirements. Our surge suppressors incorporate the latest protection devices and our patented designs. Each component of our products is selected for its precision and long term reliability.

Systems throughout the US and the world rely on Cable Innovations' line of products to keep their system up and running, no matter what mother nature or the local power company puts on the cable line.

“...the toughest power inserter/surge suppressor ever built.”



CLPS PI Series SURGE SUPPRESSOR Power Inserter

Developed and patented by Cable Innovations, the CLPS Power Inserter series combines the latest surge suppression technology (Sidactor®) with Cable Innovations' patented design to create the toughest power inserter/surge suppressor ever built. Combining this surge suppression design with the superior specifications of a power inserter makes the CLPS PI series unequaled in the industry.

If you are currently using any other type of surge suppression you owe it to yourself and your subscribers to look at Cable Innovations and the CLPS power inserter series.

Currently Available Models

MODEL #	CLPS-3009PI	CLPS-6009PI
Description	Power Inserter w/Surge Suppression	Power Inserter w/Surge Suppression
Surge Protection	5000 Amps 8 X 20 μ s	5000 Amps 8 X 20 μ s **
Power Rating	25 Amps. AC, 60/90 Volts, 60 Hz	30 Amps. AC, 60/90 Volts, 60 Hz
Power Selectable*	No	Yes
Switching Voltage	155V Peak Min. 220V Peak Max.	155V Peak Min. 220V Peak Max.
Response Time	Less than 1 nanosecond	Less than 1 nanosecond

* The CLPS-6009PI allows for the interruption of power on each signal port without sacrificing protection.

** Each port.

FEATURES

- **Sidactor® Device** The CLPS-power inserter series incorporates the newest solid state Sidactor technology. Eliminating the need for SCR type surge suppressors.
- **Overvoltages Taken off Center Conductor** Overvoltages go directly to ground from the center conductor before damage can occur to trunk or feeder electronics.
- **Superior Grounding** The CLPS-power inserter series grounds from a clamp (located on the bottom of case) using a No. 6 ground wire to make a sweeping bend to pole vertical. Grounding to the strand (the method used by "kits") should not be attempted because the overvoltage may be induced back onto the center conductor defeating the purpose of the device.
- **High Current Handling**
- **Surge Testing ANSI C-62.41 (IEEE 587)**
- **ISO 9001** The CLPS PI Series is manufactured in an ISO9001 facility .
- **Two (2) Year Warranty**
- **100% Voltage tested** Each unit is individually tested for voltage continuity before it leaves our plant.

Specifications subject to change without notice.

4737 Hwy 332 Suite 21 Hoschton, GA 30548
770-969-5146 Fax 770-962-6133
www.cableinnovations.com

CABLE®
I N N O V A T I O N S
CATV SURGE PROTECTION

The CLPS Power Inserter series protects trunk line electronics by utilizing Sidactor technology. A Sidactor is a solid state crowbar device designed to protect equipment during hazardous transient conditions. In the standby mode the Sidactor appears transparent to the circuits it protects, but upon application of a breakover voltage exceeding 135V the Sidactor will crowbar and simulate a short circuit condition which will divert the overvoltages to ground. Once clear of the high transient condition the Sidactor will reset and return to its normal high off-state impedance.

CLPS-3009PI Guaranteed Minimum Performance


Frequency (Mhz)	5-9	10-54	55-550	551-870	871-1000	1000-1218
Insertion loss (<) dB	0.5	0.5	0.5	0.7	0.8	1.5
Return loss (>) dB	16	20	22	20	18	17
Isolation (>) dB	65	65	65	60	60	55
EMI shielding (>) dB	110	110	110	110	110	110
Hum modulation @ 15 Amps/90V (>) dB	55	60	60	60	60	55

CLPS-6009PI Guaranteed Minimum Performance

Frequency (Mhz)	8-54	55-550	551-870	871-1000	1000-1218
Insertion loss (<) dB	0.8	0.8	1.0	1.3	1.7
Return loss (>) dB	20	20	17	18	17
Isolation (>) dB	65	65	65	60	55
EMI shielding (>) dB	110	110	110	110	110
Hum modulation @ 15 Amps/90V (>) dB	65	70	70	65	60

The CLPS Power Inserter series is a vital component in any network configuration. The CLPS Power Inserter inserts power from the supply into the system and protects active and passive devices from overvoltages. When combined with the CLPS-3009 stand alone unit, complete system protection is assured.

This figure displays an example of a network architecture layout utilizing the CLPS Power Inserter series and CLPS-3009

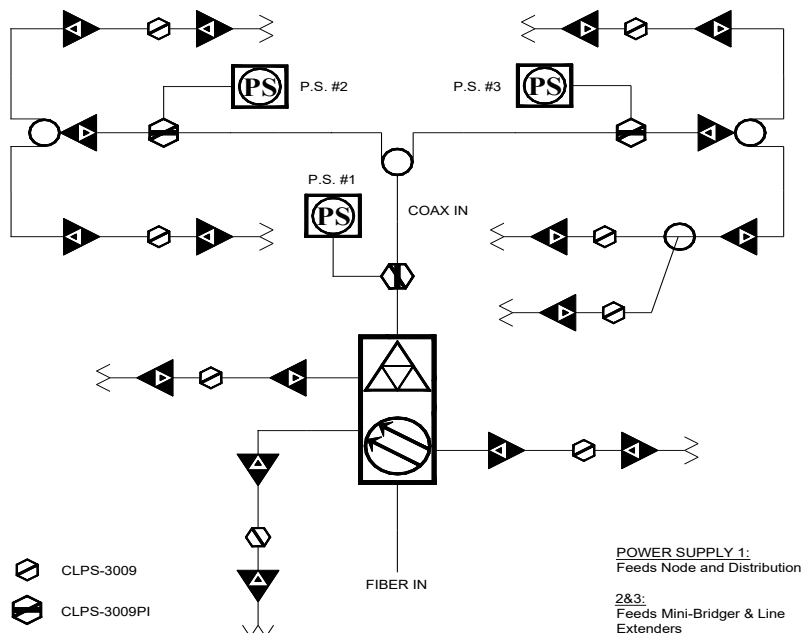

“...the toughest surge suppressor ever



CLPS-3009

Cable Line Surge Suppressor

SURGE SUPPRESSOR

Developed and patented by Cable Innovations, the CLPS-3009 protects line extenders, amplifiers, fiber nodes and other trunk equipment. The CLPS -3009 combines the latest surge suppression technology (Sidactor®) with Cable Innovations' patented design to create the toughest surge suppressor ever built.

If you are currently using any other type of surge suppression, you owe it to yourself and your subscribers to look at Cable Innovations and the CLPS series of surge suppressors.

MODEL #	CLPS-3009
Description	Surge Suppressor
Surge Protection	5000 Amps 8 X 20 μ s
Power Rating	25 Amps. AC, 60/90 Volts, 60 Hz
Switching Voltage	155V Peak Min. 220V Peak Max.
Response Time	Less than 1 nanosecond

Frequency (MHz) Guaranteed Minimum Performance	8-54	54-550	550-870	870-1000
Insertion loss (<) dB	0.3	0.25	0.25	0.25
Return loss (>) dB	20	23	23	20
EMI shielding (>) dB	100	100	100	100
Hum modulation @ 10 Amps/90V (>) dB	70	70	70	70

FEATURES


- **Sidactor® Device** The CLPS-3009 incorporates the newest solid state Sidactor technology, eliminating the need for SCR type surge suppressors.
- **Overvoltages Taken off Center Conductor** Overvoltages go directly to ground from the center conductor before damage can occur to trunk or feeder electronics.
- The CLPS-3009 grounds from a clamp (located on the bottom of case) using a No. 6 ground wire to make a sweeping bend to pole vertical. Grounding to the strand (the method used by "kits") should not be attempted, because the overvoltage may be induced back onto the center conductor, thus defeating the purpose of the device.
- **High Current Handling**
- **Surge Testing ANSI C-62.41 (IEEE 587)**
- **ISO 9001** The CLPS PI Series is manufactured in an ISO9001 facility .
- **Two (2) Year Warranty**
- **100% Voltage tested** Each unit is individually tested for voltage continuity before it leaves our plant.

Specifications subject to change without notice.

4737 Hwy 332 Suite 21 Hoschton, GA 30548
770-969-5146 Fax 770-962-6133
www.cableinnovations.com

CABLE
INNOVATIONS
CATV SURGE PROTECTION

"Combines drop clutter into a single unit"

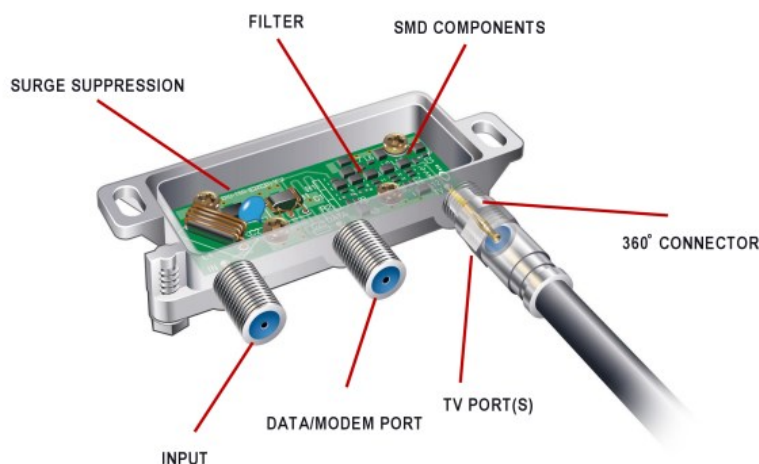

DIU SERIES

Digital Interface Unit

- The DIU may be configured into any combination of components needed. Cable Innovations currently has many different designs of DIU's and is continuing to develop more. We can also design a unit to fit your exact requirements.
- The typical collection of units is a ground block or surge suppressor, a splitter or directional coupler followed by a high pass filter, MoCA Filter or a window filter
- Each DIU contains Cable Innovations patented solid state surge suppression circuit which not only protects the DIU but also protects other drop components including the subscribers electronic equipment.
- The DIU's combination of efficiency, simplicity of installation, and superior surge protection makes it the clear choice when installing cable modem service.

FEATURES

- ◆ Voltage Blocking Capacitors on all ports to prevent ferrite core saturation
- ◆ Dual adjustable mounting tabs for easy installation
- ◆ Chromate zinc housing for superior corrosion resistance
- ◆ Patented surge suppression, other patents pending
- ◆ Soldered brass back plate to prevent rusting and provide superior EMI
- ◆ SCTE compliant "F" ports with 360 degree contact
- ◆ Surge testing ANSI C-62.41 (IEEE 587)
- ◆ SCTE approved grounding screw and ground wire connection
- ◆ Operating temperature (Ambient) -40 to +140 Degrees Fahrenheit 40 to +60 Degrees Celsius (Centigrade)
- ◆ Two (2) Year Warranty
- ◆ SMD Components for more precise specs and superior digital performance
- ◆ Meets NEC 830-30
- ◆ ISO 9001*

See back for further specifications and applications.

Surge Specifications

Switching Voltage	135V Peak Min 165V Peak Max
Response Time	Less than 1 nanosecond
Current Suppression	500 Amps (2 x 10us)

Currently Available Models

MODELS	PORTS (Output)	FILTER	S/DC	SURGE PROTECTION
DIU-15D-1	2	HPF	S	Y
DIU-15D-1-3P	3	HPF	S	Y
DIU-15D-1-4P	4	HPF	S	Y
DIU-15D-2	2	8-10	S	Y
DIU-15D-2-3P	3	8-10	S	Y
DIU-15D-2-4P	4	8-10	S	Y
DIU-15D-3	2	5-13	S	Y
DIU-15D-3-3P	3	5-13	S	Y
DIU-15D-3-4P	4	5-13	S	Y
DIU-15D-4	2	HPF	DC-6	Y
DIU-15D-4-3P	3	HPF	DC-6	Y
DIU-15D-4-4P	4	HPF	DC-6	Y
DIU-15D-5	2	8-10	DC-6	Y
DIU-15D-5-3P	3	8-10	DC-6	Y
DIU-15D-5-4P	3	8-10	DC-6	Y
DIU-15D-6	2	5-13	DC-6	Y
DIU-15D-6-3P	3	5-13	DC-6	Y
DIU-15D-6-4P	4	5-13	DC-6	Y
DIU-15D-7	2	HPF	DC-9	Y
DIU-15D-7-3P	3	HPF	DC-9	Y
DIU-15D-8	2	8-10	DC-9	Y
DIU-15D-9	2	5-13	DC-9	Y
DIU-15D-10	2	none	DC-6	Y
DIU-15D-10-3P	3	none	DC-6	Y
DIU-15D-10-4P	4	none	DC-6	Y
DIU-15D-11	2	none	DC-9	Y
DIU-15D-12	2	none	S	Y
DIU-15D-12-3P	3	none	S	Y
DIU-15D-12-4P	4	none	S	Y
DIU-15D-15	2	10.4 -12.4	S	Y
DIU-15D-16	2	10.4 -12.4	DC-6	Y
DIU-15D-17	2	10.4 -12.4	DC-9	Y
DIU-15D-20	2	MoCA	S	Y

HPF= High Pass Filter S=Splitter DC=Directional Coupler
Specifications subject to change without notice.

*Specifications for each DIU may be obtained by calling Cable Innovations at
770-962-5146 or on the web at www.cableinnovations.com*

DLPS-15D^{Series}

Solid State Drop Line Surge Suppressors

Developed and patented by Cable Innovations the DLPS-15D series protects drop line electronics from damaging faults due to surges, transients, spikes and lightning. The DLPS-15D series using solid state Sidactor technology, protects in both directions from the house and from the cable drop line. With a response time of one nanosecond, the DLPS-15D series will virtually eliminate damage to drop line electronics caused by overvoltages.

If you are currently relying on "6 KV" protection, gas discharge tubes, or just a ground block, you are taking unnecessary risks with your equipment and with your subscriber's electronics. The DLPS-15D series offers longer life, greater current handling capacity, and faster response than any other type of protection.



MODEL #	DLPS-15D/15C	DLPS-15DP*
Application	Drop Protection	Drop Protection
Surge Protection	500 Amps (2 x 10µs)	500 Amps (2 x 10µs)
Power Passing	Up to 1 amp	Up to 1 amp
Switching Voltage	135V Peak Min.165V Peak Max.	135V Peak Min.165V Peak Max.
Response Time	Less than 1 nanosecond	Less than 1 nanosecond

*The DLPS-15DP utilizes the same circuitry as the DLPS-15D, but with a different orientation of F-ports

SPECIFICATIONS						
Guaranteed Minimum Performance						
FREQUENCY (MHZ)	5-15	15-250	250-550	550-900	900-1000	1000-1250
Insertion Loss	0.5	0.4	0.4	0.4	0.6	0.7
Return Loss	24	25	25	25	22	20
EMI Shielding	>120dB	>120dB	>120dB	>120dB	>120dB	>120dB

FEATURES

- **Sidactor® Device** The DLPS-15D series incorporates the newest solid state Sidactor technology which responds faster than any other type of drop line surge suppression.
- **Longer Life** THE DLPS-15D series' performance will not degrade during repeated overvoltage conditions. A gas tube device's performance rating is degraded each time an overvoltage occurs. You can count on the DLPS series on the 1st surge or the 5000th surge.**
- **Overvoltages Taken off Center Conductor** Patented design takes overvoltages directly to ground from the center conductor, before damage can occur to drop line electronics
- **Temperature Range** -40 to +140 °F -40 to +60 °C
- **Surge Testing** ANSI C-62.41 (IEEE 587)
- **ISO 9001** - The DLPS series is manufactured in an ISO 9001 facility
- **Two (2) Year Warranty**
- **Meets NEC 830**
- **Compatible with RG-6 and RG-59** RG-7 and RG-11 require connectors with center conductor seizure pins.

** As long as surge rating is not exceeded

4737 Hwy 332 Suite 21 Hoschton, GA 30548
770-969-5146 Fax 770-962-6133
www.cableinnovations.com

CABLE[®]
I N N O V A T I O N S
CATV SURGE PROTECTION

DLPS-15C

Drop Line Surge Suppressor

The easy to install DLPS-15C protects drop line electronics from surges, transients, spikes and lightning. The DLPS-15C, using solid state Sidactor technology, protects in both directions from the house and from the cable drop line.

If you are currently using "6kv" protection, gas discharge tubes, or just a ground block, you are taking unnecessary risks with your equipment and with your subscriber's electronics. The DLPS-15C offers longer life, greater current handling capacity, and a faster response than any other type of protection.



SPECIFICATIONS

Surge Life	10A (10 x 1000µs) 1000A (10 x 1000µs)	Infinite surges Infinite surges
Power Passing	Up to 1 amp	
Switching Voltage	135V Peak Min.	165V Peak Max.
Response Time	Less than 1 nanosecond	
Current Suppression	1000 Amps (2 x 10µs)	

PERFORMANCE

Frequency	5-15 mhz	15-250 mhz	250-550 mhz	550-900 mhz	900-1000 mhz
Insertion loss	< 0.75dB	< 0.5dB	< 0.5dB	< 0.5dB	< 0.75dB
Return loss	> 21dB	> 21dB	> 21dB	> 21dB	> 21dB
EMI shielding	> 120dB	> 120dB	> 120dB	> 120dB	> 120dB

FEATURES

- **Attaches to ground block** The DLPS-15C design allows for quick installation to the subscribers ground block.
- **Longer Life** THE DLPS-15C performance will not degrade during repeated overvoltage conditions. A gas tube device's performance rating is degraded each time an overvoltage occurs. You can count on the DLPS-15C on the 1st surge or the 5000th surge.
- **Sidactor® Device** The DLPS-15C incorporates the newest solid state Sidactor technology which eliminates the need for gas tube type surge suppressors.
- **Overvoltages Taken off Center Conductor** Patented design takes overvoltages directly to ground from the center conductor, before damage can occur to drop line electronics
- **High Current Handling** DLPS-15C Handles 1000 Amps.
- **ISO 9001** The DLPS series is manufactured in an ISO 9001 facility
- **Surge Testing ANSI C-62.41 (IEEE 587)**
- **Two (2) Year Warranty**
- **Meets NEC 830**



Specifications subject to change without notice.

4737 Hwy 332 Suite 21 Hoschton, GA 30548
770-969-5146 Fax 770-962-6133
www.cableinnovations.com

CABLE
INNOVATIONS
CATV SURGE PROTECTION

DLPS-MoCA

Drop Line Surge Suppressor/POE filter

The easy to install DLPS-MoCA protects drop line electronics from surges, transients, spikes and lightning with the added benefit of an integrated MoCA POE filter. The DLPS-MoCA, using solid state Sidactor technology, protects in both directions from the house and from the cable drop line.

If you are currently using “6kv” protection, gas discharge tubes, or just a ground block, you are taking unnecessary risks with your equipment and with your subscriber’s electronics. The DLPS-MoCA offers longer life, greater current handling capacity, and a faster response than any other type of protection.



SPECIFICATIONS

Frequency	Pass Band 5-1000 MHz	Stop Band 1125-1625 MHz
Surge Life	10A (10 x 1000µs) Infinite surges	1000A (10 x 1000µs) Infinite surges
Power Passing	Up to 1 amp	
Switching Voltage	135V Peak Min.	165V Peak Max.
Response Time	Less than 1 nanosecond	
Current Suppression	500 Amps (2 x 10µs)	

PERFORMANCE

Frequency	5-750 MHz	750-871MHz	871-1000 MHz	1125-1200 MHz	1201-1625 MHz
Insertion loss	< 0.5dB	< 0.5dB	< 1.5dB	> 35dB	>40dB
Return loss	> 20dB	> 18dB	> 18dB	-	-
EMI shielding	> 120dB	> 120dB	> 120dB	> 120dB	> 120dB

FEATURES


- **Replaces ground block** The DLPS-MoCA is installed in place of a ground block.
- **Longer Life** THE DLPS-MoCA performance will not degrade during repeated overvoltage conditions. A gas tube device's performance rating is degraded each time an overvoltage occurs. You can count on the DLPS-MoCA on the 1st surge or the 5000th surge.
- **Sidactor® Device** The DLPS-MoCA incorporates the newest solid state Sidactor technology which eliminates the need for gas tube type surge suppressors.
- **Overvoltages Taken off Center Conductor** Patented design takes overvoltages directly to ground from the center conductor, before damage can occur to drop line electronics
- **ISO 9001** The DLPS series is manufactured in an ISO 9001 facility
- **Surge Testing ANSI C-62.41 (IEEE 587)**
- **Meets NEC 830**

Specifications subject to change without notice



4737 Hwy 332 Suite 21 Hoschton, GA 30548
770-969-5146 Fax 770-962-6133
www.cableinnovations.com

CABLE
INNOVATIONS
CATV SURGE PROTECTION

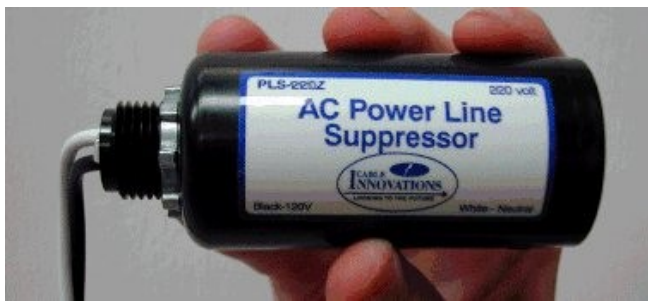

PLS-SERIES

Power Line Surge Suppressors

Cable Innovations' PLS series of power line surge suppressors reduces outages and customer complaints by **eliminating breaker outages**, blown fuses in power supplies, and damage to power supplies due to voltage transients, surges, spikes and lightning. The PLS-125Z, 220Z and 225Z are each wired into the breaker panel. The PLS-125P is designed for ease of installation, and may be plugged into a 110 volt outlet inside the power supply enclosure.

The PLS-125P
will fit in the
smallest places

2 Inches




Currently Available Models

MODELS	PLS-125Z	PLS-220Z	PLS-225Z	PLS-125P
Line Voltage	120 VAC	220 VAC	Dual 120 VAC	125VAC
Peak Current (8/20 ms)	80,000 Amps	80,000 Amps	80,000 Amps*	36,000 Amps
Response Times	<1 nanosecond	<1 nanosecond	<1 nanosecond	<1 nanosecond
Frequency	50,60,400 HZ	50,60,400 HZ	50,60,400 HZ	50,60,400 HZ
Maximum Clamp Voltage	340 VAC	650 VAC	340 VAC	330 VAC
Energy (10/1000ms)	1120 Joules	2200 Joules	1120 Joules**	540 Joules
Maximum Leakage Current	<1.0 mA	<1.0 mA	<1.0 mA	<1.0 mA
Operating Temp. Range	-40 to 140 °F	-40 to 140 °F	-40 to 140 °F	-40 to 140 °F
Capacitance	15200 pF	7880 pF	15200 pF	11820 pF
Wiring	14 awg 18" Long	14 awg 18" Long	14 awg 18" Long	Plug in
Protection	L-N	L-N	L-N-L	L-G-N

**Total for circuit

FEATURES:

- Greater current handling capacity
- On Line LED Indicator
- Shock Proof Case
- No Maintenance UL-94rated case
- May be installed inside power supply

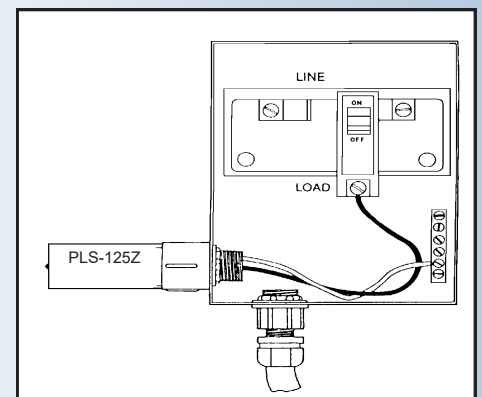

Specifications subject to change without notice.
*The PLS Series is manufactured in an ISO9001 facility.

ISO 9001*

Two (2) Year Warranty

4737 Hwy 332 Suite 21 Hoschton, GA 30548
770-969-5146 Fax 770-962-6133
www.cableinnovations.com

CABLE
INNOVATIONS
CATV SURGE PROTECTION



PSB-3S

980 Joule, 3 Outlet Power Surge Block

The PSB-3S is a 980 joule, 3 outlet subscriber premise surge suppressor. The PSB-3S provides protection for set top boxes, modems and subscriber connected equipment.

Reduce Complaints

When a surge enters through the power line and harms the subscriber's TV or computer. Who do they blame ?

Diagnostic LEDs

Two diagnostic LEDs (GROUNDED & PROTECTED) show power and protection status, The GROUNDED LED verifies that the PSB-3S is connected to a properly grounded wall outlet. The PROTECTED LED indicates that surge protection is functioning.

FEATURES

- **32,000** AMPS maximum spike current
- Full 3 line surge protection
- **980 Joules**
- Diagnostic LEDs
- 3 AC outlets
- 15 amp
- Cable Innovations' quality, reliability and support

Technical Specifications

Electrical Rating:15A, 125 VAC, 60Hz, 1800 Watts	Surge Lines Protected (3-Line) : (L-N, L-G, N-G)
Clamping Voltage : L-N 550V, L-G 550V, N-G 550V	Surge Energy Joule Rating: 980 Joules
Maximum Spike Current : 32000A (3 Line Total)	Response Time:<1 Nanosecond
Maximum Spike Voltage : 6KV	EMI/RFI Noise Filter Frequency:150KHz~100MHz
Certified CSA STD C22.2NO.42 - Conforms UL STD 498A and UL1449-ETL Listed	

Specifications subject to change without notice.



PSB - 2160X

Power Surge Block

The PSB-2160X is a 2160 joule, 8 outlet subscriber premise surge suppressor. The PSB-2160 provides protection for set top boxes, modems and subscriber connected equipment.

Reduce Complaints

Many subscribers have no form of surge suppression on their TVs and Computers. When a surge enters through the power line and harms the subscriber's TV who do they call to complain to, The Cable Company. Installation of the PSB-2160X will eliminate most of these types of complaints.

FEATURES

- 144000 AMPS maximum spike current
- Full 3 line surge protection
- **2160 Joules**
- EMI/RFI noise filter
- 8 AC outlets
- 15 amp overload resettable circuit breaker
- Cable Innovations' quality, reliability and support

Specifications subject to change without notice.



Technical Specifications

Electrical Rating :15A, 125 VAC, 60Hz, 1800 Watts	Surge Lines Protected (3-Line) : (L-N, L-G, N-G)
Clamping Voltage : L-N 400V , L-G 400V , N-G 500V	Surge Energy Joule Rating: 2160 Joules
Maximum Spike Current :144000A (3 Line Total)	Response Time :<1 Nanosecond
Maximum Spike Voltage : 6KV	EMI/RFI Noise Filter Frequency :150KHz~100MHz
Attenuation : Up to 60dB	TEL/FAX Protection Jack Type : RJ11

4737 Hwy 332 Suite 21 Hoschton, GA 30548
770-969-5146 Fax 770-962-6133
www.cableinnovations.com

CABLE
INNOVATIONS
CATV SURGE PROTECTION



Filters

High-Pass Filters

Window Filters

F-type 1 GHz

CI-0513 5-13 MHz Window Filter

Frequency (Mhz)	5-13	16-40	54-60	60-75	75-1000
Insertion loss (dB)	<2.0	—	<1.25	<1.0	<0.5
Trap Depth (dB)	—	>40	—	—	—
Return loss (dB)	>18	—	>18	>18	>18

CI-0810 8-10 MHz Window Filter

Frequency (Mhz)	8-10	14-40	54-60	60-75	75-1000
Insertion Loss (dB)	< 2.0	—	<1.25	<1.0	<0.5
Trap Depth >40dB @ 5Mhz	—	>40	—	—	—
Return loss (dB)	>18	—	>18	>18	>18

HPF-50 High-Pass Filter

Frequency (Mhz)	5-40	54-60	60-75	75-1000
Insertion loss (dB)	—	<1.0	<1.0	<0.5
Trap Depth(dB)	>40	—	—	—
Return loss (dB)	—	>20	>20	>20

For a high-pass filter with surge suppression see the DLPS-15DF or DIU series.




Cat. # DCB-220

Drop Line Voltage Block

APPLICATIONS:

Stop voltage on the drop.
Stop voltage to input of test equipment.
Use with CII-03 RF monitor

- Bandwidth: 5~2150 MHz.
- Blocks AC voltage to 220 volts
- Holding force: >50 Kg
- Return Loss: -20 dB 5-1000 MHz. -18 dB 1000-2150 MHz
- Female to Male "F" fittings
- Blocks DC voltage to 1000 volts
- Twisted force: >50 Kg
- Insertion Loss: 0.2 dB 5-1000 MHz 0.4 dB 1000-2300 MHz
- Operating Temperature: - 40°~70 C°
- Two (2) Year Warranty
- Bright nickel plated brass housing.
- ISO 9001



Cat. # CI-35-265

ALUMINUM GROUNDING LUG

APPLICATION:

Improves grounding by grounding to the pole vertical. Grounds any trunk passives including taps, DCs and splitters.